

Hands Free Colour LCD Video Doorphone



50-748 Hands free 5.6" Colour LCD Video Kit Flush Mount

50-749 Hands free 5.6" Colour LCD Video Kit Surface Mount

50-750 Hands free 5.6" LCD Colour Monitor Only

Kit Contains:

- Front Camera Door Station
- Video Monitor
- Power Supply

Product Features:

- Hands free talking, supervising and remote unlocking
- 5.6" Colour LCD Display
- Enjoy a constantly clear & bright picture on the screen at any light level from 0.1 Lux (night or day)
- System can be expanded
- Dual Conversation is available. Call between monitors is available
- High performance 1/3" Colour CCD Camera
- Viewing angle 92.8°



CM-06DNRI



CM-06DNS



CM-06DN

Technical Specifications:

CM-06DNRI

Working Voltage:	DC18V +/- 10%
Static Current:	≤60mA
Working Current:	≤700mA
Colour Display:	5.6" Colour LCD Display
Resolution:	450 x 250 points
Environment Temperature:	-10°C ~ +55°C
Humidity:	45% ~ 95%

CM-06DN/CM-06DNS

Working Voltage:	DC12V +/- 10%
Static Current:	≤12mA
Working Current:	≤180mA
Camera:	1/3" CCD View Angel 92.8° Min. luminance 0.1 Lux Lens: F=3.6
Environment Temperature:	-25°C ~ +70°C
Humidity:	45% ~ 95%

Hands Free Colour LCD Video Doorphone



50-725 Hands free 2.5" Colour LCD Video Kit Flush Mount

50-740 Hands free 2.5" Colour LCD Video Kit Surface Mount

50-742 Hands free 2.5" LCD Colour Monitor Only

Kit Contains:


- Front Camera Door Station
- Video Monitor
- Power Supply

Product Features:

- Hands free talking, supervising and remote unlocking
- 2.5" Colour LCD Display
- Enjoy a constantly clear & bright picture on the screen at any light level from 0.1 Lux (night or day)
- System can be expanded
- Dual Conversation is available. Call between monitors is available
- High performance 1/3" Colour CCD Camera
- Viewing angle 92.8°



CM-06DNRL
(Monitor)

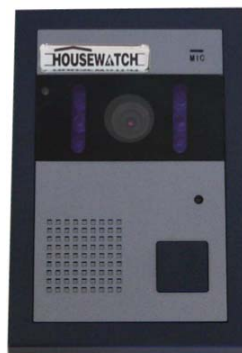

DN-06DNK



DN-06DNS

Technical Specifications:

CM-06DNRL

Working Voltage:	DC18V +/- 10%
Static Current:	≤60mA
Working Current:	≤700mA
Colour Display:	2.5" Colour LCD Display
Resolution:	450 x 250 points
Environment Temperature:	-10°C ~ +55°C
Humidity:	45% ~ 95%

CM-06DNS/CM-06DNK

Working Voltage:	DC12V +/- 10%
Static Current:	≤12mA
Working Current:	≤180mA
Camera:	1/3" CCD View Angel 92.8° Min. luminance 0.1 Lux Lens: F=3.6
Environment Temperature:	-25°C ~ +70°C
Humidity:	45% ~ 95%